




MOXY | RIGID CORE CLICK



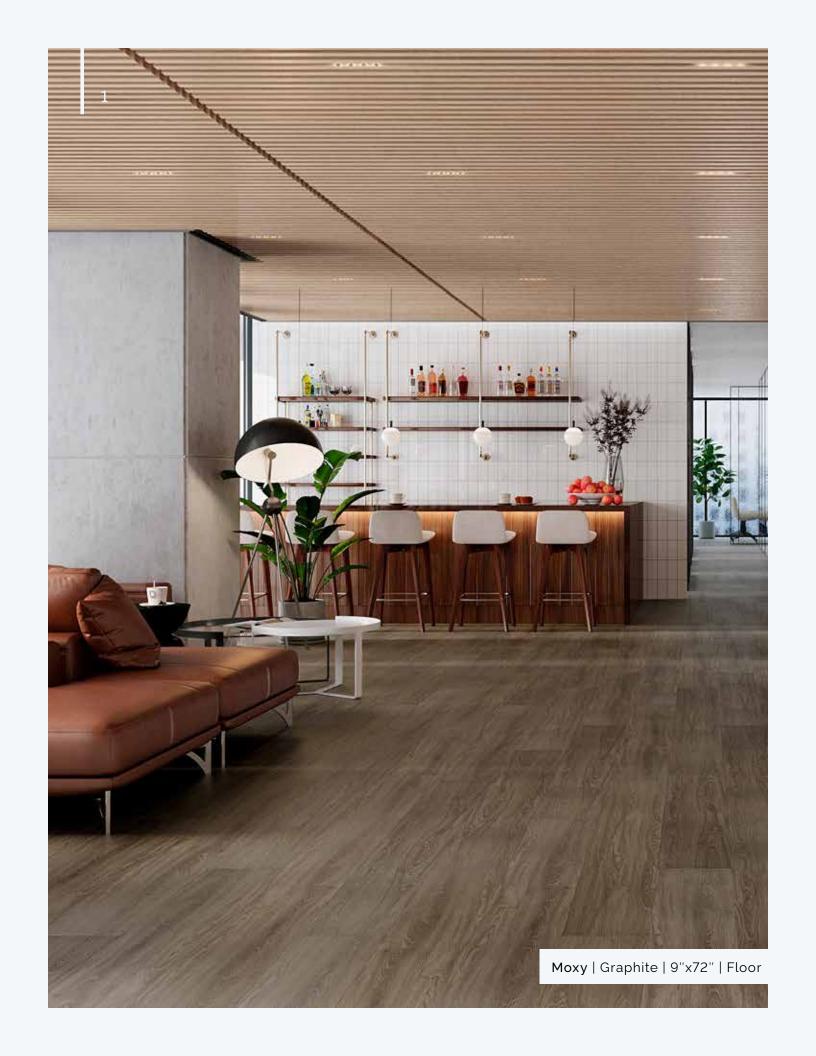

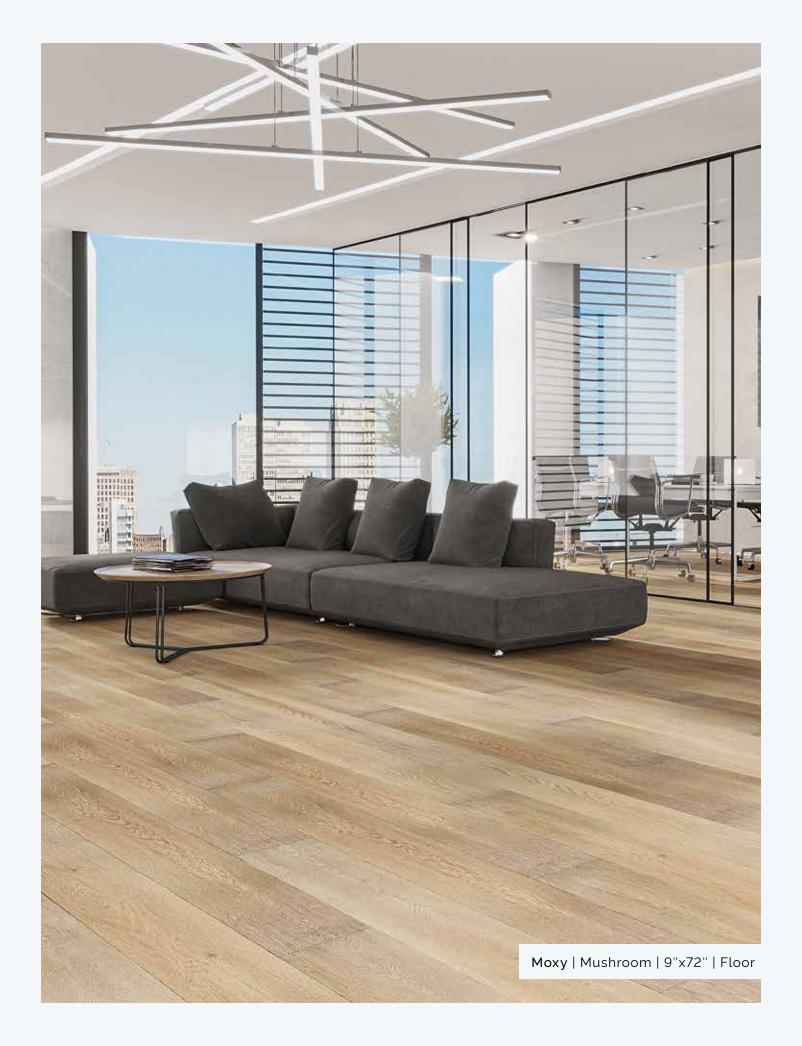

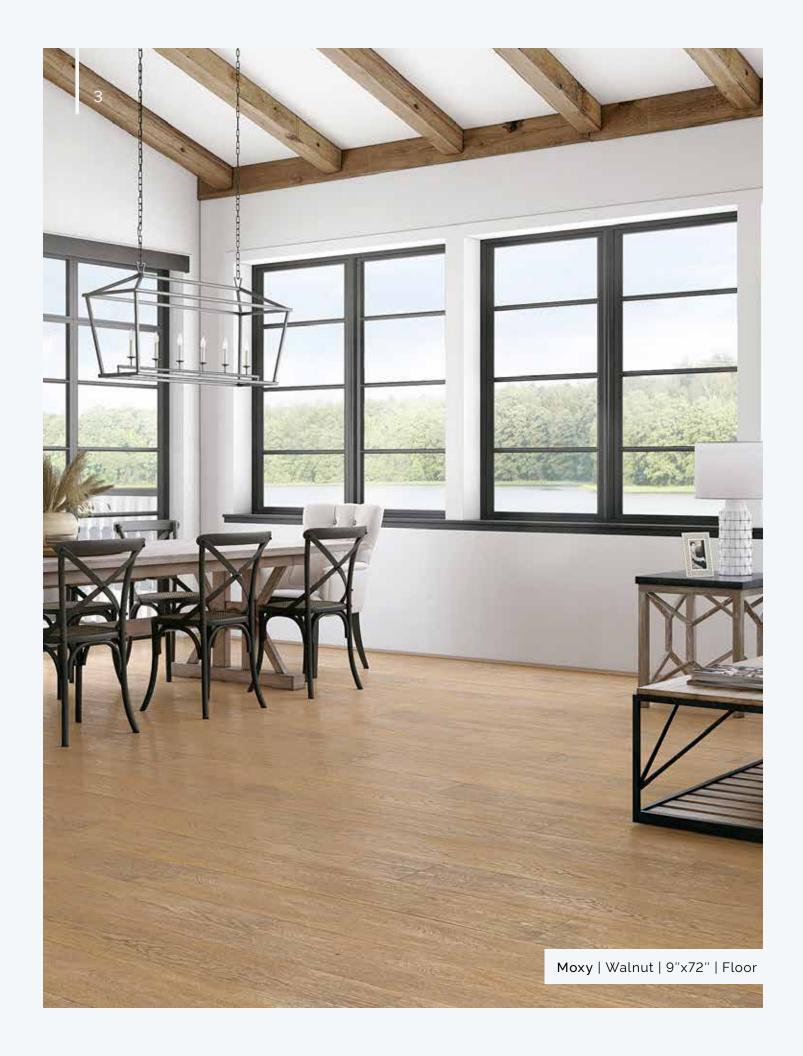

## IMOXY Rigid Core Click


### IRIGID CORE CLICK TECHNICAL DATA

28 MIL RIGID CORE CLICK SPECIFICATIONS				
All Colors In Stock				
Available Sizes:	9" x 72"			
Construction:	Rigid Core Click Luxury Vinyl Tile			
Classification:	ASTM F3261 Class I Type B Grade I Backing Class B			
Total Thickness:	6.0 mm (0.240") (Includes 1.0 mm Acoustic Backing)			
Wear Layer Thickness:	28 mil (0.70 mm)			
Edge Treatment:	Micro-Bevel			
Finish:	ProTX™ Topcoat			
Colorways:	9			
Installation Method:	Click Floating			
Locking System:	UNILIN Angle/Drop			
Backing Color:	Black			
Pieces per Carton:	4 pcs (9x72)			
Weight per Carton:	38.58 lbs (9x72)			
Square Feet per Carton:	17.98 sq ft (9x72)			
Cartons per Pallet:	68 (9x72)			
ADDITIONS				

#### APPLICATIONS

Commercial Spaces: Foot traffic only and rolling loads under 500 lbs. Educational Institutions, Healthcare, Senior Living, Hospitality, Retail, Workplace.

Residential: Multi-Family, Single Family

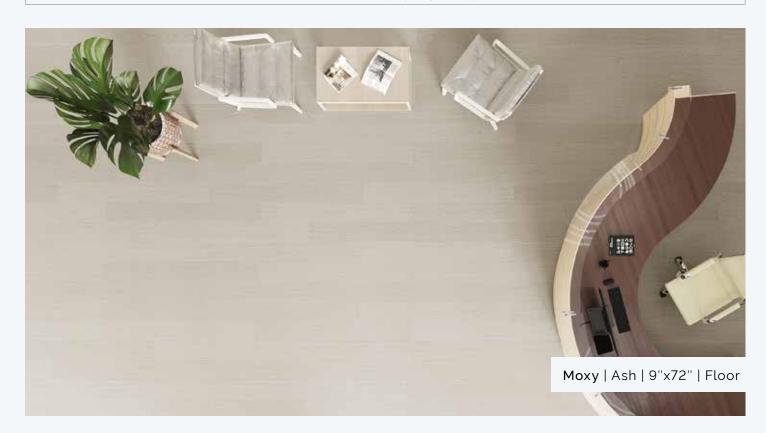

## IMOXY Rigid Core Click

### IRIGID CORE CLICK TESTING SPECIFICATIONS

28 MIL RIGID CORE CLICK				
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in./lin ft			
Squareness (ASTM F540)	Passes - Max ± 0.010			
Flatness (ISO 24337)	Passes			
Opening (ISO 24337)	Passes			
Ledging (ISO 24337)	Passes			
Residual Indentation (ASTM F1914)	Avg. ≤ 0.007 in (0.16 mm)   No puncture through wear layer / print film			
Static Load (ASTM F970 / Modified)	Passes - Modified Test (anything beyond 250 PSI) - 1,500 PSI: Residual Indent ≤ 0.005"			
Acoustics (ASTM E492)	54 - Over 6" Concrete Slab   68 - Over 6" Concrete Slab and Drop Ceiling			
Flooring Radiant Panel (ASTM E648)	Passes - Class 1: ≥ 0.45 watts/cm²			
Smoke Density (ASTM E662)	Passes - ≤ 450			
Slip Resistance (ASTM D2047)	Passes - SCOF ≥ 0.6			
Resistance to Light (ASTM F1515)	Passes - ΔΣ≤8.0			
Chemical Resistance (ASTM F925)	Excellent			
Resistance to Heat (ASTM F1514)	Passes			
Castor Chair (EN 425)	Passes			


















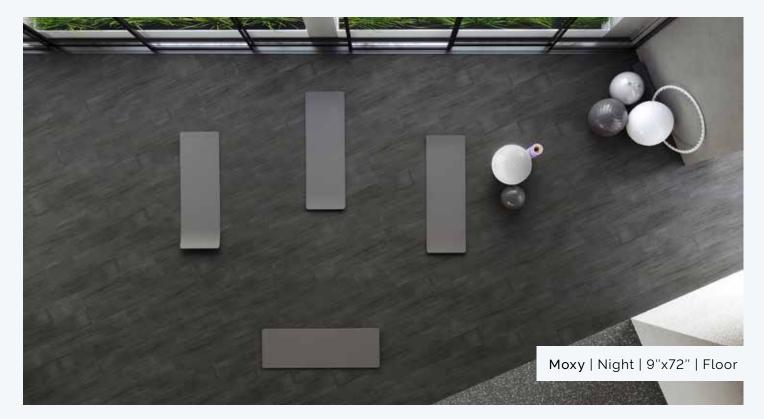



# **IMOXY** Rigid Core Click



### ■ SIZES + FORMATS

DESIGN	SIZE	28 MIL RIGID CORE CLICK		
Ash	9x72	•		
Chestnut	9x72	•		
Coffee	9x72	•		
Graphite	9x72	•		
Lunar	9x72	•		
Mushroom	9x72	•		
Night	9x72	•		
Timber	9x72	•		
Walnut	9x72	•		
● In Stock   ■ Available to Order				

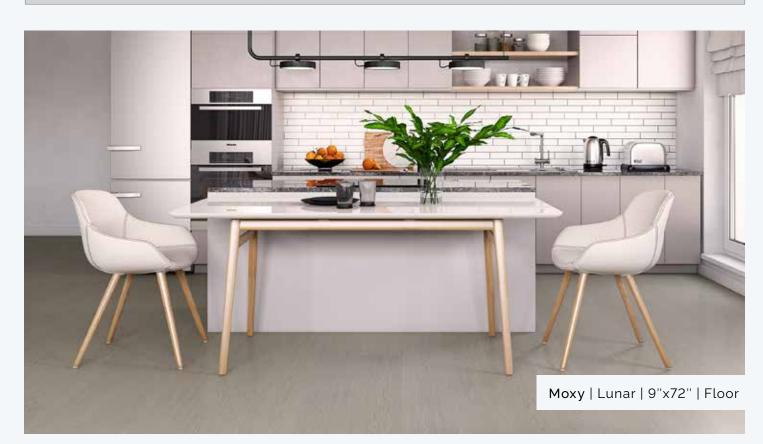

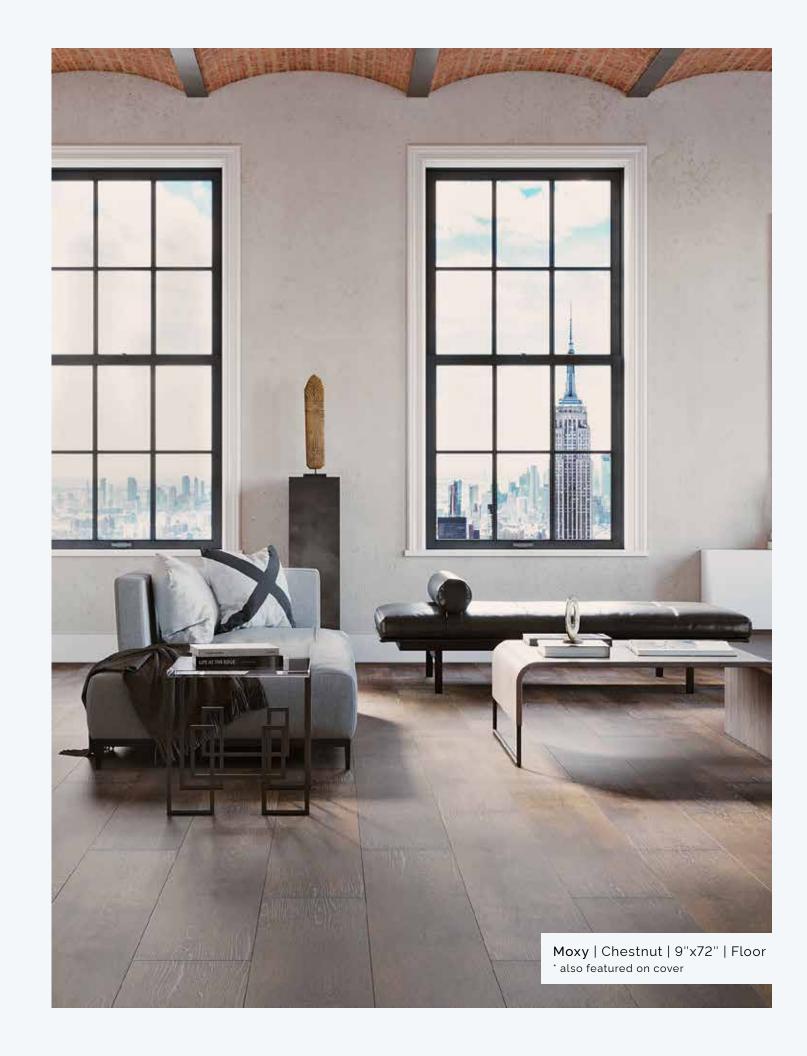



Luxurious benefits include micro-beveled panels, sound-dampening acoustic backing, UNILIN angle-drop installation, fiberglass layers and high wear layer options. Explore luxury collections with exquisite value per square foot and a 10-year warranty on every floor.

#### FORMULATED FOR SUCCESS

Mapping out a winning TileBar LVT solution means choosing the right product for the right application. Heavy Commercial locations with high-weight deliveries? Light Commercial needs for light rolling loads and heavy foot traffic? Multi-Family/Residential needs that can hold up to any wear and tear? With glue-down and click-in installation options available in all categories, TileBar has developed the perfect LVT solution for your application needs.











888.541.3840 Info@TileBar.com

TileBar Trade Trade@TileBar.com 888.277.2260

From Outside USA 516.734.0405

### SHOWROOMS

45 West 21st Street New York, NY 10010

(212) 256-1540 NYCshowroom@TileBar.com **BALTIMORE** 

1133 Greenwood Rd. Baltimore, MD 21208

(888) 541-3840 DMVshowroom@TileBar.com

**PARAMUS** 443 NJ-17 Paramus, NJ 07652

(888) 541-3840 NJshowroom@TileBar.com

#### **FULFILLMENT CENTERS**

NJ WAREHOUSE 800 Coopertown Rd.

Delanco, NJ 08075

(888) 541-3840 Info@TileBar.com **AZ WAREHOUSE** 

901 South 86th Avenue, Suite 101 Tollerson, AZ 85353

(888) 541-3840 Info@TileBar.com