

A modern interior space featuring large windows and a dark, wood-look vinyl tile floor. The room is furnished with contemporary sofas, armchairs, and coffee tables. Large, woven pendant lights hang from the ceiling. The text 'tilebar LVT' is overlaid in the upper center.

# tilebar LVT


LUXURY VINYL TILE

12 MIL | 20 MIL | 28 MIL

## RISTRETTO LVT

RIGID CORE CLICK | LOOSE LAY | GLUE DOWN



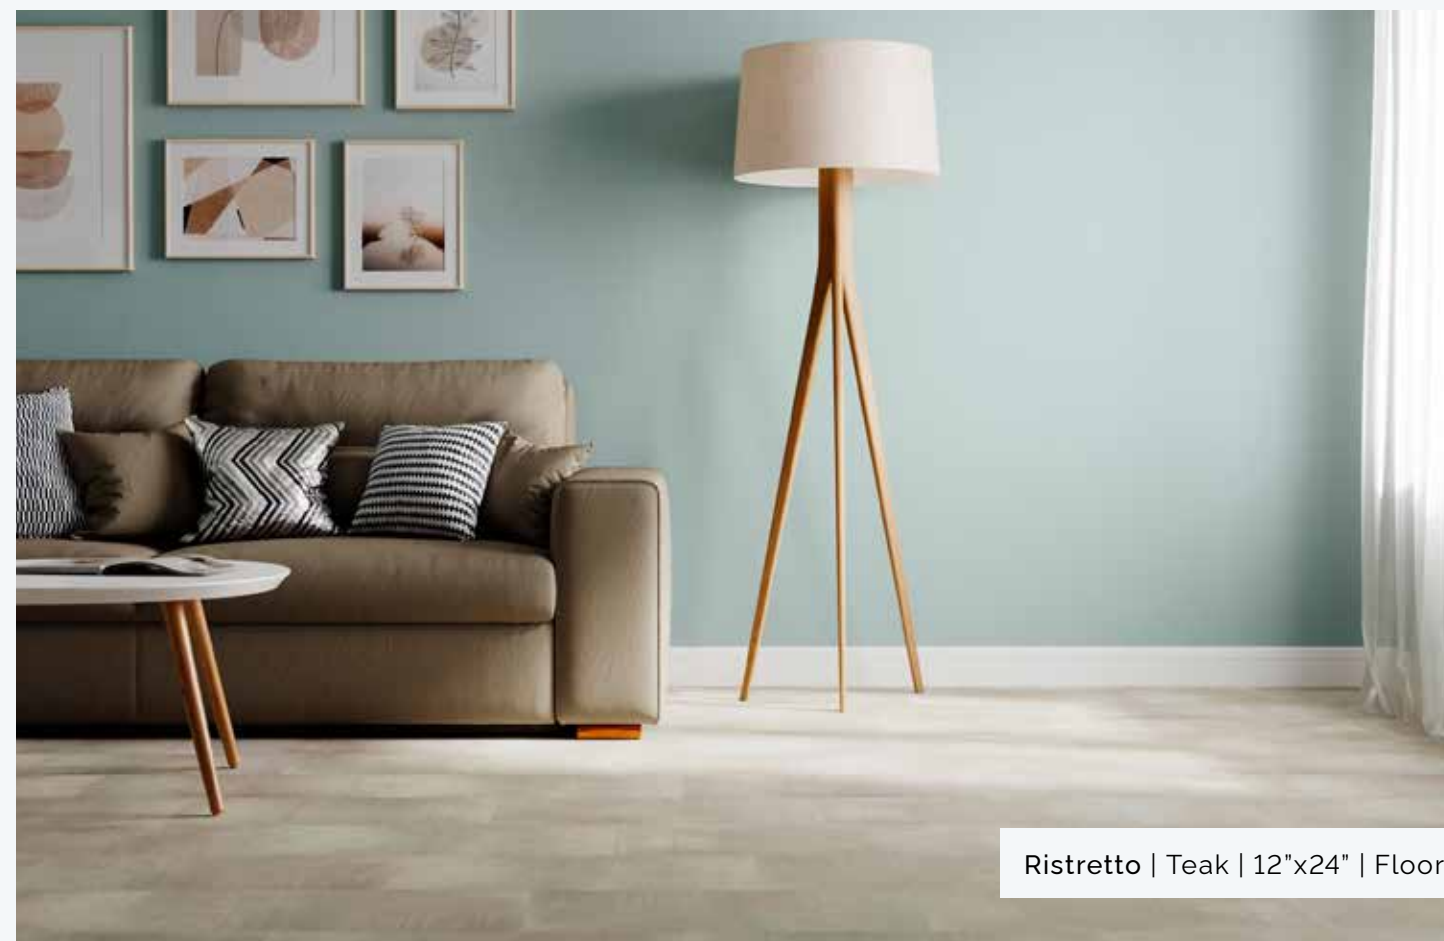





# IRISTRETTO LVT

Rigid Core Click | Loose Lay | Glue Down

## IRIGID CORE CLICK TECHNICAL DATA

| 20 MIL RIGID CORE CLICK SPECIFICATIONS   |   |
|--|---|
| All Colors in Stock  |   |
| Available Sizes:   | 12" x 24"   |
| Construction:  | Rigid Core Click Luxury Vinyl Tile                |
| Classification:  | ASTM F3261 Class I Type B Grade I Backing Class B |
| Total Thickness:   | 5.0mm (0.200") (Includes 1.0mm Acoustic Backing)  |
| Wear Layer Thickness:  | 20mil (0.50mm)                                    |
| Edge Treatment:  | Micro-Bevel                                       |
| Finish:  | ProTX™  |
| Color:   | 3   |
| Installation Method:   | Click   |
| Locking System:  | Valinge   |
| Backing Color:   | Black   |
| Pieces per Carton:   | 10  |
| Weight per Carton:   | 33 lbs  |
| Square Feet per Carton:  | 20  |
| Cartons per Pallet:  | 68  |
| APPLICATIONS   |   |
| <b>Commercial Spaces:</b> Foot Traffic Only and Rolling Loads under 500 lbs. Educational Institutions, Healthcare, Senior Living, Hospitality, Retail, Workplace |   |
| <b>Residential:</b> Multi-Family, Single Family  |   |

| 20 MIL RIGID CORE CLICK             |  |
|-------------------------------------|--|
| Dimensional Stability (ASTM F2199): | Passes - Max 0.020 in./lin ft  |
| Squareness (ASTM F540):             | Passes - Max ± 0.010   |
| Flatness (ISO 24337)                | Passes   |
| Opening (ISO 24337)                 | Passes   |
| Ledging (ISO 24337)                 | Passes   |
| Residual Indentation (ASTM F1914):  | Avg. ≤ 0.007 in. (0.16 mm)   No puncture thru wear layer/print film                    |
| Static Load (ASTM F970 mod.):       | Passes – Modified Test (anything beyond 250 PSI) = 1,500 PSI; Residual Indent ≤ 0.005" |
| Acoustics (ASTM E492)               | 54 - Over 6" Concrete Slab   68 - Over 6" Concrete Slab and Drop Ceiling               |
| Flooring Radiant Panel (ASTM E648): | Passes - Class 1: ≥ 0.45 watts/cm2   |
| Smoke Density (ASTM E662):          | Passes - ≤ 450   |
| Slip Resistance (ASTM D2047):       | Passes - SCOF≥ 0.6   |
| Resistance to Light (ASTM F1515):   | Passes - ΔΣ≤ 8.0   |
| Chemical Resistance (ASTM F925):    | Excellent  |
| Resistance to Heat (ASTM F1514):    | Passes   |
| Castor Chair (EN 425)               | Passes   |

  
PET FRIENDLY

  
CASTOR CHAIR  
APPROVED

  
ANGLE/DROP

  
WATERPROOF

  
ACOUSTIC  
VALUE









Ristretto | Charcoal | 12"x24" | Floor





# IRISTRETTO LVT

Rigid Core Click | Loose Lay | Glue Down

## LOOSE LAY TECHNICAL DATA

| 28 MIL LOOSE LAY SPECIFICATIONS   |                              |
|---|------------------------------|
| All Colors Available to Order   |                              |
| Available Sizes:  | 12" x 24"                    |
| Classification:   | ASTM F1700 Class III, Type B |
| Total Thickness:  | 4.5 mm (0.180")              |
| Wear Layer Thickness:   | 28mil (0.70mm)               |
| Edge Treatment:   | Micro-Bevel                  |
| Color:  | 3                            |
| Backing Color:  | Black                        |
| Pieces per Carton:  | 9                            |
| Weight per Carton:  | 33 lbs                       |
| Square Feet per Carton:   | 18                           |
| Cartons per Pallet:   | 68                           |
| APPLICATIONS  |                              |
| No Adhesive: Foot traffic only. No rolling loads.                                   |                              |
| Perimeter Adhesive Installation: Rolling loads up to 500 lbs.                       |                              |
| Full-Spread Adhesive: Heavy commercial foot traffic and rolling loads above 500 lbs |                              |

| 28 MIL LOOSE LAY                   |  |
|------------------------------------|--|
| Dimensional Stability (ASTM F2199) | Passes - Max 0.020 in./lin ft  |
| Squareness (ASTM F540)             | Passes - Max ± 0.010   |
| Flatness (ISO 24337)               | Passes   |
| Opening (ISO 24337)                | Passes   |
| Ledging (ISO 24337)                | Passes   |
| Residual Indentation (ASTM F1914)  | Avg. ≤ 0.007 in (0.16 mm)   No puncture through wear layer / print film                |
| Static Load (ASTM F970 / Modified) | Passes - Modified Test (anything beyond 250 PSI) - 1,500 PSI: Residual Indent ≤ 0.005" |
| Acoustics (ASTM E492)              | 54 - Over 6" Concrete Slab   68 - Over 6" Concrete Slab and Drop Ceiling               |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1: ≥ 0.45 watts/cm²   |
| Smoke Density (ASTM E662)          | Passes - ≤ 450   |
| Slip Resistance (ASTM D2047)       | Passes - SCOF ≥ 0.6  |
| Resistance to Light (ASTM F1515)   | Passes - ΔΣ±8.0  |
| Chemical Resistance (ASTM F925)    | Excellent  |
| Resistance to Heat (ASTM F1514)    | Passes   |
| Castor Chair (EN 425)              | Passes   |

  
PET FRIENDLY

  
CASTOR CHAIR  
APPROVED

  
WATERPROOF

  
ACOUSTIC  
VALUE









Ristretto | Dark | 12"x24" | Floor

IRISTRETTO LVT

Rigid Core Click | Loose Lay | Glue Down

IGLUE DOWN TECHNICAL DATA

| 12 MIL GLUE DOWN SPECIFICATIONS   |                              |
|---|------------------------------|
| All Colors in Stock   |                              |
| Available Sizes:  | 12" x 24"                    |
| Construction:   | Loose Lay Luxury Vinyl Tile  |
| Classification:   | ASTM F1700 Class III, Type B |
| Total Thickness:  | 2.0 mm (0.80")               |
| Wear Layer Thickness:   | 12mil (0.30mm)               |
| Edge Treatment:   | Micro-Bevel                  |
| Finish:   | ProTX™                       |
| Color:  | 3                            |
| Application Method:   | Full Spread Adhesive         |
| Backing Color:  | Black                        |
| Pieces per Carton:  | 20                           |
| Weight per Carton:  | 33 lbs                       |
| Square Feet per Carton:   | 40                           |
| Cartons per Pallet:   | 68                           |
| APPLICATIONS  |                              |
| Light Commercial: Heavy Foot Traffic.<br>Residential: Multi-Family, Single Family |                              |

| 12 MIL GLUE DOWN                   |  |
|------------------------------------|--|
| Dimensional Stability (ASTM F2199) | Passes - Max 0.020 in./lin ft  |
| Squareness (ASTM F540)             | Passes - Max ± 0.010   |
| Flatness (ISO 24337)               | Passes   |
| Opening (ISO 24337)                | Passes   |
| Ledging (ISO 24337)                | Passes   |
| Residual Indentation (ASTM F1914)  | Avg. ≤ 0.007 in (0.16 mm)   No puncture through wear layer / print film                |
| Static Load (ASTM F970 / Modified) | Passes - Modified Test (anything beyond 250 PSI) - 1,500 PSI: Residual Indent ≤ 0.005" |
| Acoustics (ASTM E492)              | 54 - Over 6" Concrete Slab   68 - Over 6" Concrete Slab and Drop Ceiling               |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1: ≥ 0.45 watts/cm²   |
| Smoke Density (ASTM E662)          | Passes - ≤ 450   |
| Slip Resistance (ASTM D2047)       | Passes - SCOF ≥ 0.6  |
| Resistance to Light (ASTM F1515)   | Passes - ΔI≤8.0  |
| Chemical Resistance (ASTM F925)    | Excellent  |
| Resistance to Heat (ASTM F1514)    | Passes   |
| Castor Chair (EN 425)              | Passes   |



PET FRIENDLY



CASTOR CHAIR  
APPROVED



WATERPROOF



floor  
score



ISO  
9001



ISO  
14001



PHTHALATE  
FREE

IRISTRETTO LVT

Rigid Core Click | Loose Lay | Glue Down



VIEW COLLECTION

ISIZES + FORMATS



12"x24" | Rigid Core Click



12"x24" | Loose Lay



12"x24" | Glue Down

| DESIGN                            | SIZE  | 20 MIL RIGID CORE CLICK | 28 MIL LOOSE LAY | 12 MIL GLUE DOWN |
|-----------------------------------|-------|-------------------------|------------------|------------------|
| Dark                              | 12X24 | ●                       | ■                | ●                |
| Teak                              | 12X24 | ●                       | ■                | ●                |
| Charcoal                          | 12X24 | ●                       | ■                | ●                |
| ● In Stock   ■ Available to Order |       |                         |                  |                  |



Ristretto | Teak | 12"x24" | Floor





tilebar<sup>LVT</sup>

**| RESEARCHED. DESIGNED. REFINED.**

Developing the perfect flooring for any application type requires thousands of thoughtful research and development hours. Today, TileBar LVT represents the industry's best flooring features, bridging the gap between luxe natural flooring and the ease of modern maintenance. Luxurious benefits include micro-beveled panels, sound-dampening acoustic backing, UNILIN angle-drop installation, fiberglass layers and high wear layer options. Explore luxury collections with exquisite value per square foot and a 10-year warranty on every floor.

**| FORMULATED FOR SUCCESS**

Mapping out a winning TileBar LVT solution means choosing the right product for the right application. Heavy Commercial locations with high-weight deliveries? Light Commercial needs for light rolling loads and heavy foot traffic? Multi-Family/Residential needs that can hold up to any wear and tear? With glue-down and click-in installation options available in all categories, TileBar has developed the perfect LVT solution for your application needs.

tilebar

Follow Us On:

888.541.3840  
Info@TileBar.com

TileBar Trade  
Trade@TileBar.com  
888.277.2260

From Outside USA  
516.734.0405

**SHOWROOMS**

**NYC**  
45 West 21st Street  
New York, NY 10010  
  
(212) 256-1540  
NYCshowroom@TileBar.com

**BALTIMORE**  
1133 Greenwood Rd.  
Baltimore, MD 21208  
  
(888) 541-3840  
DMVshowroom@TileBar.com

**PARAMUS**  
443 NJ-17  
Paramus, NJ 07652  
  
(888) 541-3840  
NJshowroom@TileBar.com

**FULFILLMENT CENTERS**

**NJ WAREHOUSE**  
800 Coopertown Rd.  
Delanco, NJ 08075  
  
(888) 541-3840  
Info@TileBar.com

**AZ WAREHOUSE**  
901 South 86<sup>th</sup> Avenue, Suite 101  
Tollerson, AZ 85353  
  
(888) 541-3840  
Info@TileBar.com