

# MOXY RIGID CORE CLICK LVT

tilebar LVT



## POWERED BY PERFORMANCE

The Moxy Collection brings the distinguished look of extra-long and wide wood flooring to light commercial and residential spaces. Available in a full suite of realistic hardwood colorways, this collection is perfect for creating an expansive visual effect while providing efficient floor coverage. Our state-of-the-art LVT products are engineered layer-by-layer to offer the best performance while providing great design solutions for any budget.

## WHY MOXY LVT?

- Proprietary ProTX™ UV-cured urethane topcoat protects against abrasions and provides industry-leading scratch, scuff, stain, and chemical resistance
- Easy-to-Install & Maintain
- Waterproof
- Affordable
- State-of-the-art print technology
- Acoustical backing layer provides sound reduction (floor to floor)
- In-stock and ready to ship

## WOOD LOOKS



ASH



CHESTNUT



COFFEE



GRAPHITE




LUNAR



MUSHROOM



NIGHT

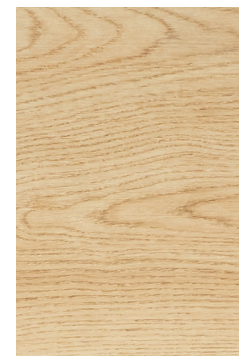

TIMBER



WALNUT



PET FRIENDLY



ANGLE / CLICK



WATER PROOF



ACOUSTIC VALUE



CASTOR CHAIR APPROVED



# MOXY RIGID CORE CLICK LVT

tilebar<sup>LVT</sup>



COLORS	SIZE	28 MIL
Ash	9x72	●
Chestnut	9x72	●
Coffee	9x72	●
Graphite	9x72	●
Lunar	9x72	●
Mushroom	9x72	●
Night	9x72	●
Timber	9x72	●
Walnut	9x72	●
● In Stock   ● Available to Order		

RIGID CORE CLICK SPECIFICATIONS	
Available Sizes:	9" x 72"
Construction:	Rigid Core Click Luxury Vinyl Tile
Classification:	ASTM F3261 Class I Type B Grade I Backing Class B
Total Thickness:	6.0 mm (0.240") (Includes 1.0 mm Acoustic Backing)
Wear Layer Thickness:	28 mil (0.70 mm)
Edge Treatment:	Micro-Bevel
Finish:	ProTX™ Topcoat
Colorways:	9
Installation Method:	Click Floating
Locking System:	UNILIN
Backing Color:	Black
Pieces per Carton:	4 pcs (9x72)
Weight per Carton:	38.58 lbs (9x72)
Square Feet per Carton:	17.98 sq ft (9x72)
Cartons per Pallet:	68 (9x72)

TECHNICAL DATA	
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in./lin ft
Squareness (ASTM F540)	Passes - Max ± 0.010
Flatness (ISO 24337)	Passes
Opening (ISO 24337)	Passes
Ledging (ISO 24337)	Passes
Residual Indentation (ASTM F1914)	Avg. ≤ 0.007 in (0.16 mm)   No puncture through wear layer / print film
Static Load (ASTM F970 / Modified)	Passes - Modified Test (anything beyond 250 PSI) - 1,500 PSI: Residual Indent ≤ 0.005"
Acoustics (ASTM E492)	54 - Over 6" Concrete Slab   68 - Over 6" Concrete Slab and Drop Ceiling
Flooring Radiant Panel (ASTM E648)	Passes - Class 1: ≥ 0.45 watts/cm²
Smoke Density (ASTM E662)	Passes - ≤ 450
Slip Resistance (ASTM D2047)	Passes - SCOF ≥ 0.6
Resistance to Light (ASTM F1515)	Passes - ΔΣ ≤ 8.0
Chemical Resistance (ASTM F925)	Excellent
Resistance to Heat (ASTM F1514)	Passes
Castor Chair (EN 425)	Passes