




TEPOCA | Loose Lay



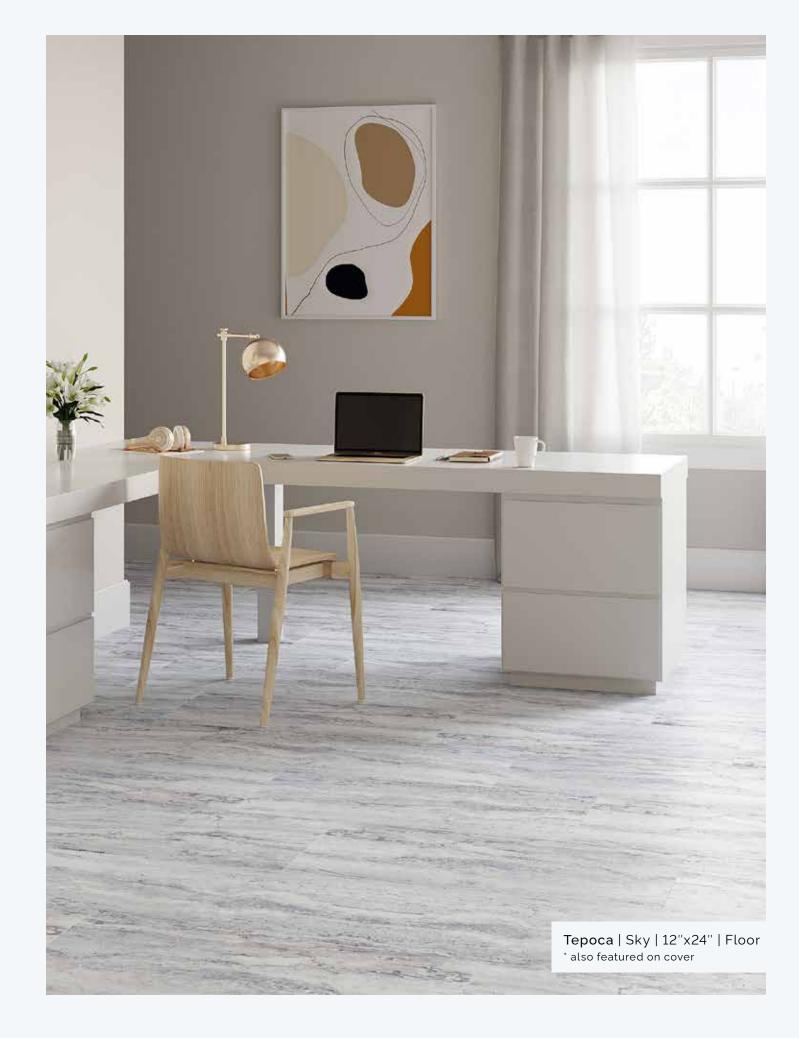

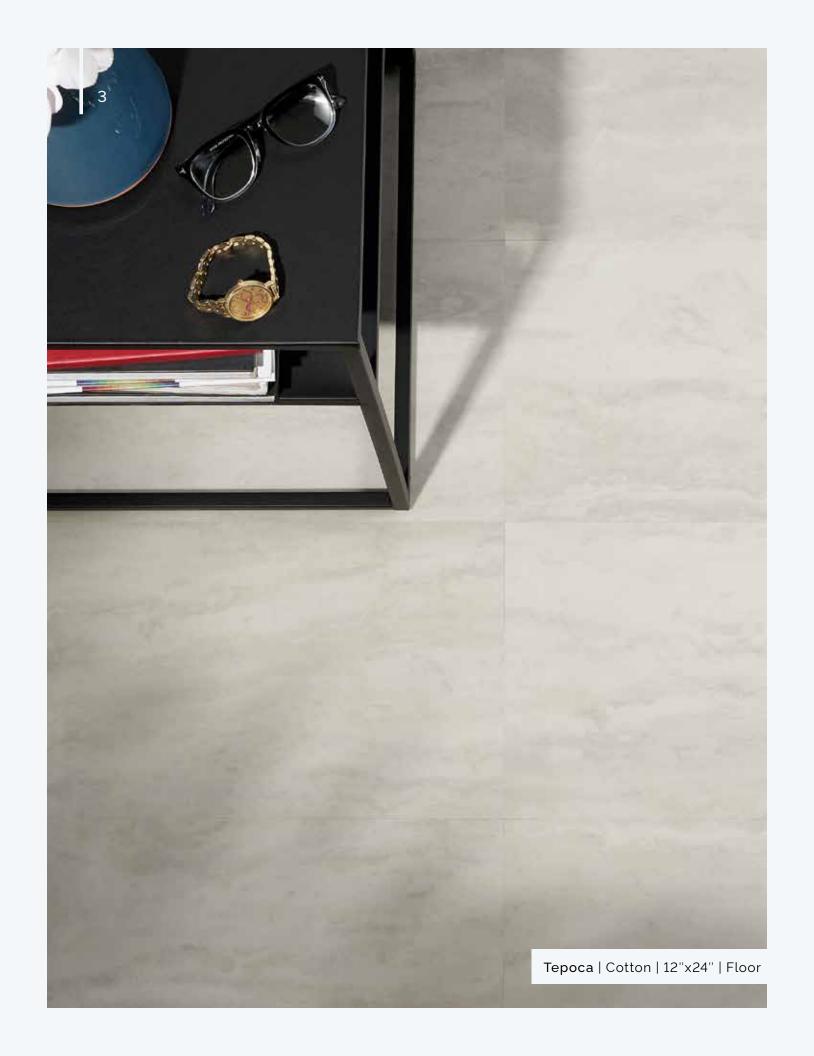

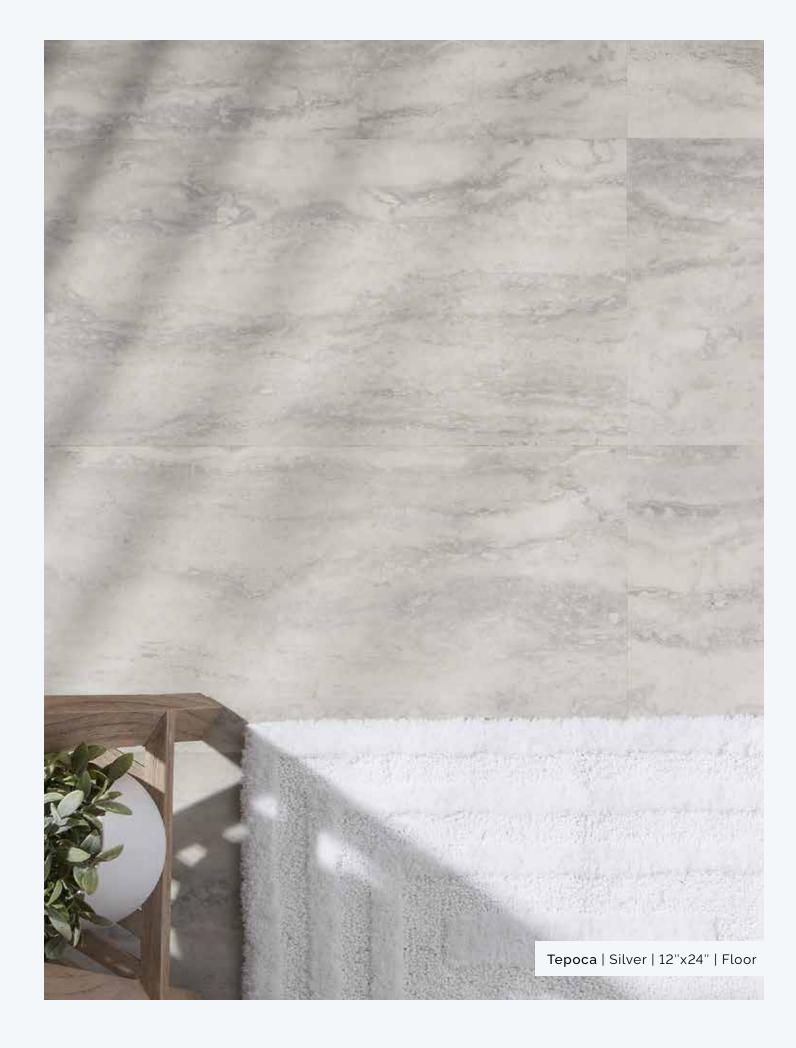

ITEPOCA Loose Lay LVT

ILOOSE LAY TECHNICAL DATA


LOOSE LAY SPECIFICATIONS		
In Stock and Ready to Ship		
Available Size:	12" x 24"	
Construction:	Loose Lay Luxury Vinyl Tile	
Classification:	ASTM F1700 Class III, Type B	
Total Thickness:	4.5 mm (0.180")	
Wear Layer Thickness:	28 mil (0.70 mm)	
Edge Treatment:	Micro-Bevel	
Finish:	ProTX™ Topcoat	
Colorways:	4	
Installation Method:	Loose Lay or Perimeter / Grid / Full Spread Adhesive	
Backing Color:	Black	
Pieces per Carton:	11 pcs	
Weight per Carton:	34 lbs	
Square Feet per Carton:	22 sf	
Cartons per Pallet:	54	

APPLICATIONS

No Adhesive: Foot traffic only. No rolling loads.

Perimeter Adhesive Installation: Rolling loads up to 500 lbs.

Full-Spread Adhesive: Heavy commercial foot traffic and rolling loads above 500 lbs.

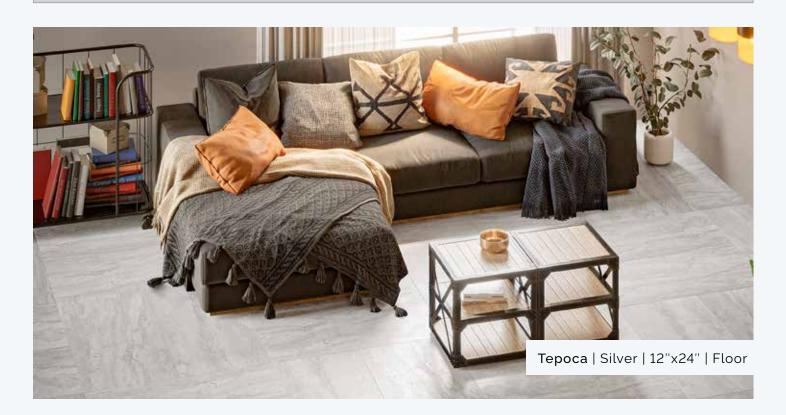

ITEPOCA Loose Lay LVT

ILOOSE LAY TESTING SPECIFICATIONS

28 MIL LOOSE LAY		
Dimensional Stability (ASTM F2199):	Passes - Max 0.020 in./linear foot	
Squareness (ASTM F540):	Passes - Max ± 0.010	
Flatness (ISO 24337):	Passes	
Opening (ISO 24337):	Passes	
Ledging (ISO 24337):	Passes	
Residual Indentation (ASTM F1914):	Avg. ≤ 0.007 in (0.16mm) No puncture through wear layer / print film	
Static Load (ASTM F970 / Modified):	Passes - Modified Test (anything beyond 250 PSI) - 1,500 PSI: Residual Indent ≤ 0.005"	
Impact Isolation Class (ASTM E492):	50 - Over 6" Concrete Slab 64 - Over 6" Concrete Slab and Drop Ceiling	
Sound Transmission Class (ASTM E90):	51 - Over 6" Concrete Slab	
Sound Transmission Reduction Radiated (ASTM E2179):	ΔIIC - 16	
Flooring Radiant Panel (ASTM E648):	Passes - Class 1: ≥ 0.45 watts/cm2	
Smoke Density (ASTM E662):	Passes - ≤ 450	
Slip Resistance (ASTM D2047):	Passes - SCOF ≥ 0.6	
Resistance to Light (ASTM F1515):	Passes - ΔΣ≤8.0	
Chemical Resistance (ASTM F925):	Excellent	
Resistance to Heat (ASTM F1514):	Passes	
Castor Chair (EN 425):	Passes	



















ITEPOCA Loose Lay LVT




I SIZES + FORMATS

12"x24"

COLOR	SIZE	28 MIL LOOSE LAY	
Cotton	12x24	•	
Night	12x24	•	
Silver	12x24	•	
Sky	12x24	•	
● In Stock □ Available to Order			



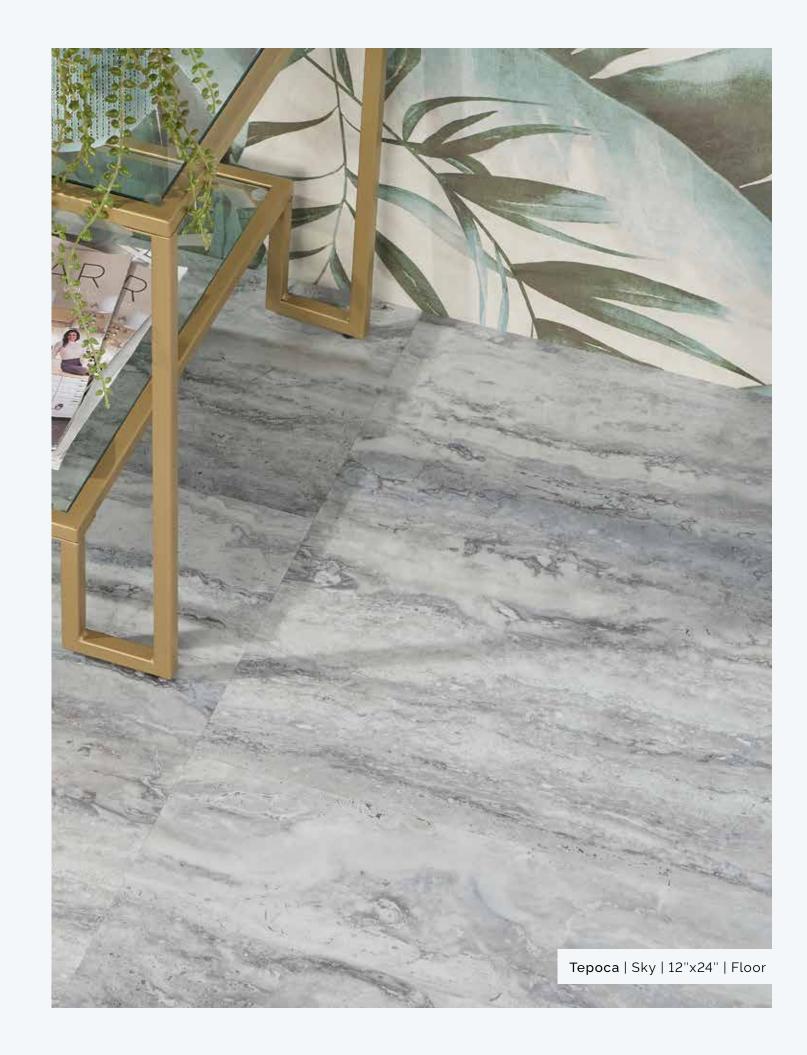



Mapping out a winning TileBar LVT solution means choosing the right product

for the right application. Heavy Commercial locations with high-weight deliveries? Light Commercial needs for light rolling loads and heavy foot traffic?

Multi-Family/Residential needs that can hold up to any wear and tear? With glue-down and

click-in installation options available in all categories, TileBar has developed the perfect LVT

FORMULATED FOR SUCCESS

solution for your application needs.

tilebar









TileBar Trade Trade@TileBar.com 888.277.2260

From Outside USA 516.734.0405

SHOWROOMS

45 West 21st Street New York, NY 10010

(212) 256-1540 NYCshowroom@TileBar.com **BALTIMORE**

1133 Greenwood Rd. Baltimore, MD 21208

(888) 541-3840 DMVshowroom@TileBar.com

PARAMUS 443 NJ-17 Paramus, NJ 07652

(888) 541-3840 NJshowroom@TileBar.com

FULFILLMENT CENTERS

NJ WAREHOUSE 800 Coopertown Rd.

Delanco, NJ 08075

(888) 541-3840 Info@TileBar.com

AZ WAREHOUSE 901 South 86th Avenue, Suite 101 Tollerson, AZ 85353

(888) 541-3840 Info@TileBar.com