



tilebar^{LVT}


LUXURY VINYL TILE

12 MIL

SKY | Rigid Core Click | Glue Down




Sky | Driftwood Hickory Sea | 6"x48" | Floor

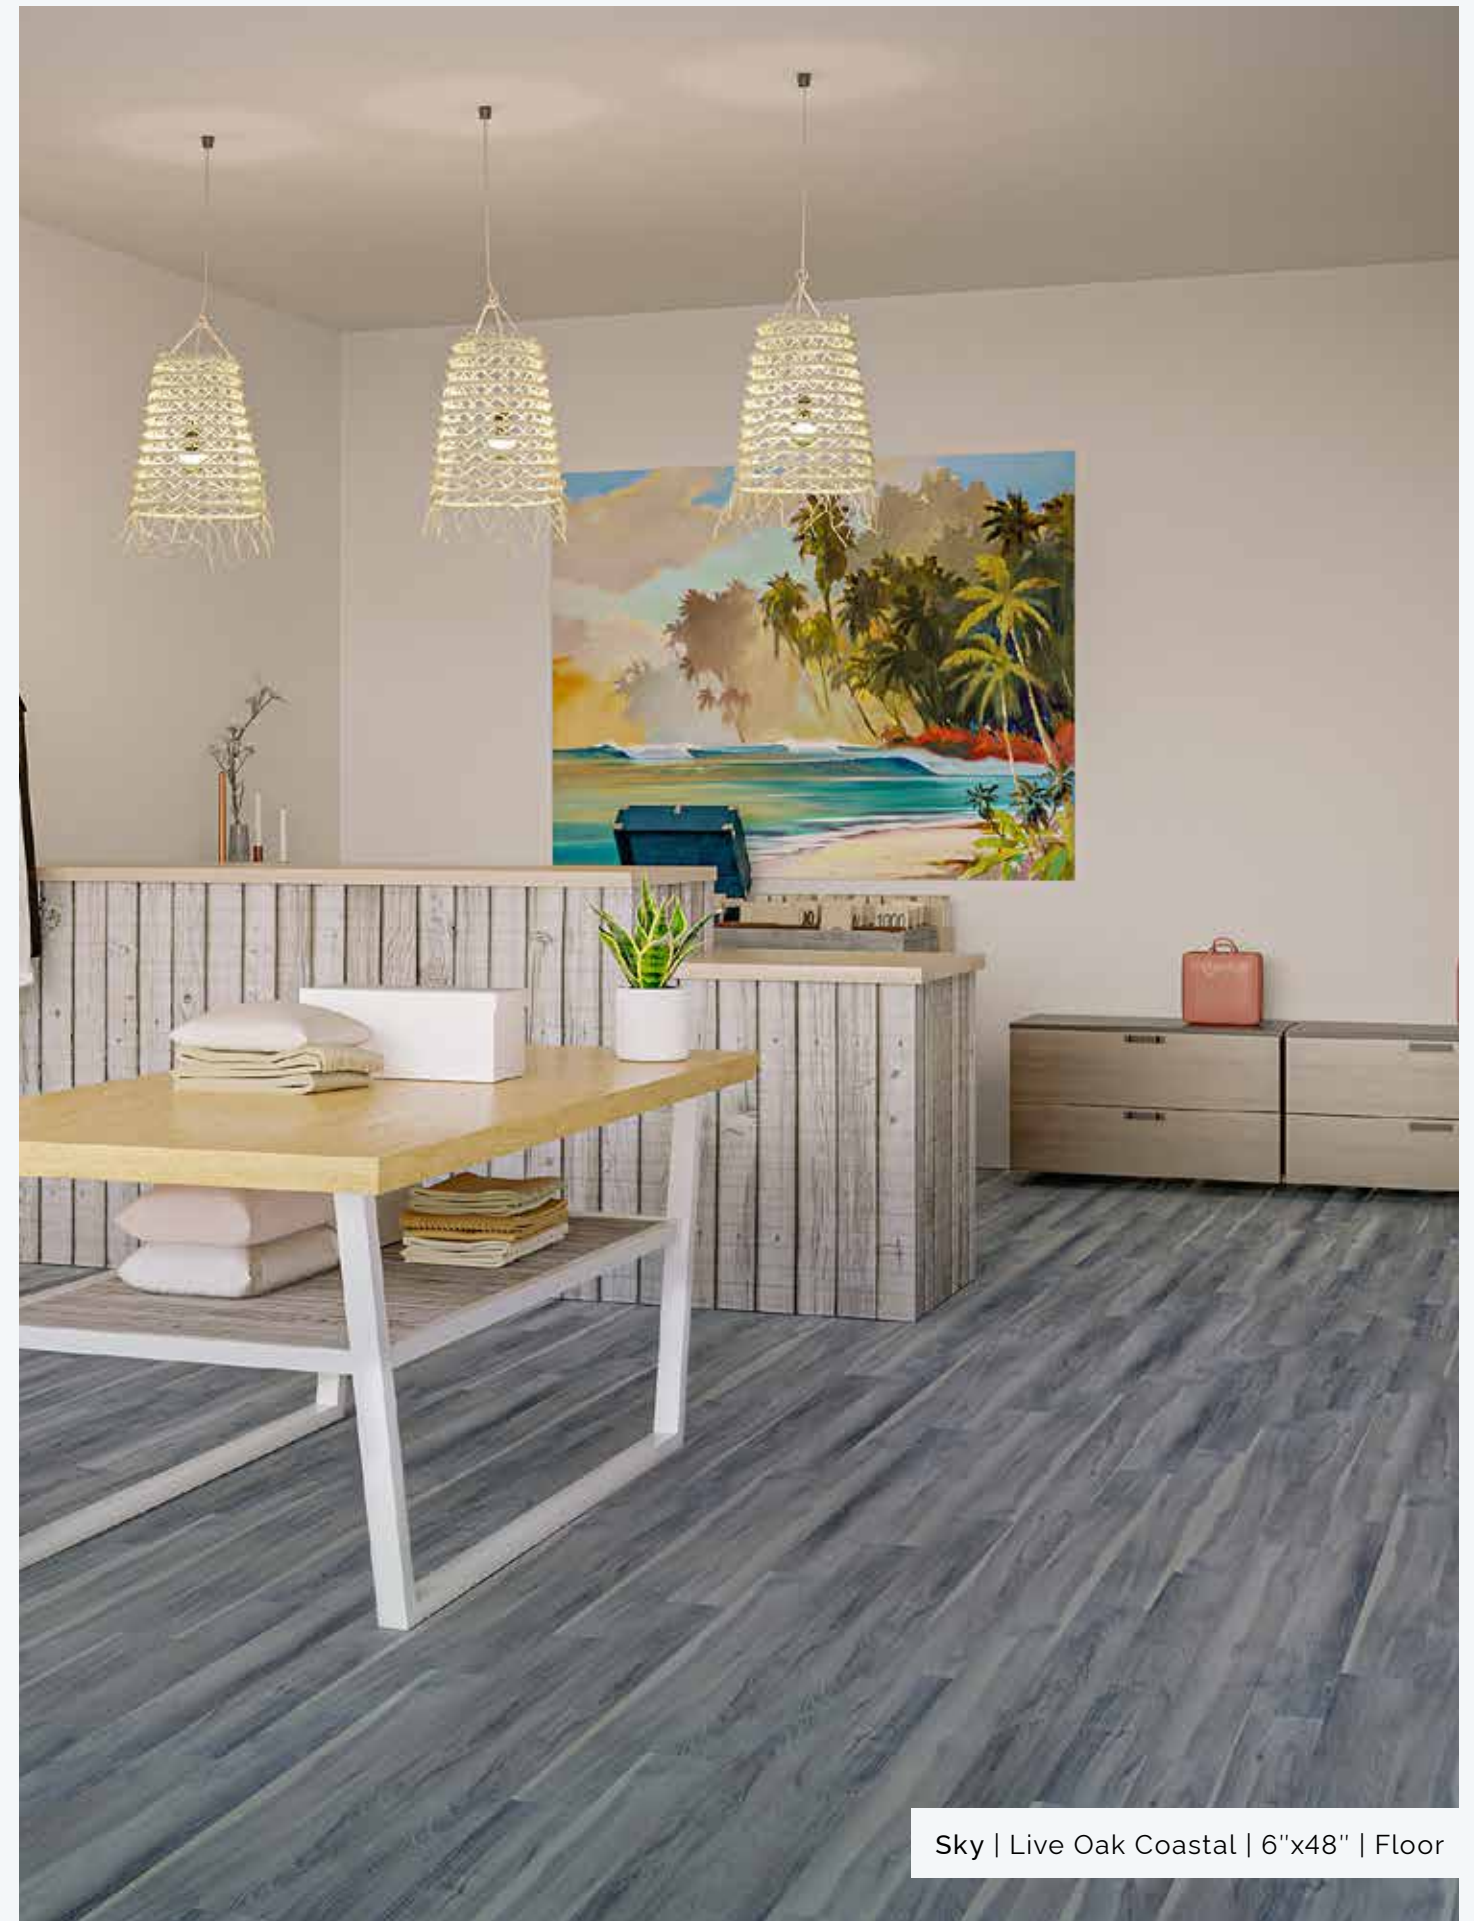

Sky | Live Oak Coastal | 6"x48" | Floor



Sky | Shellbark Hickory Bliss | 6"x48" | Floor
* also featured on cover

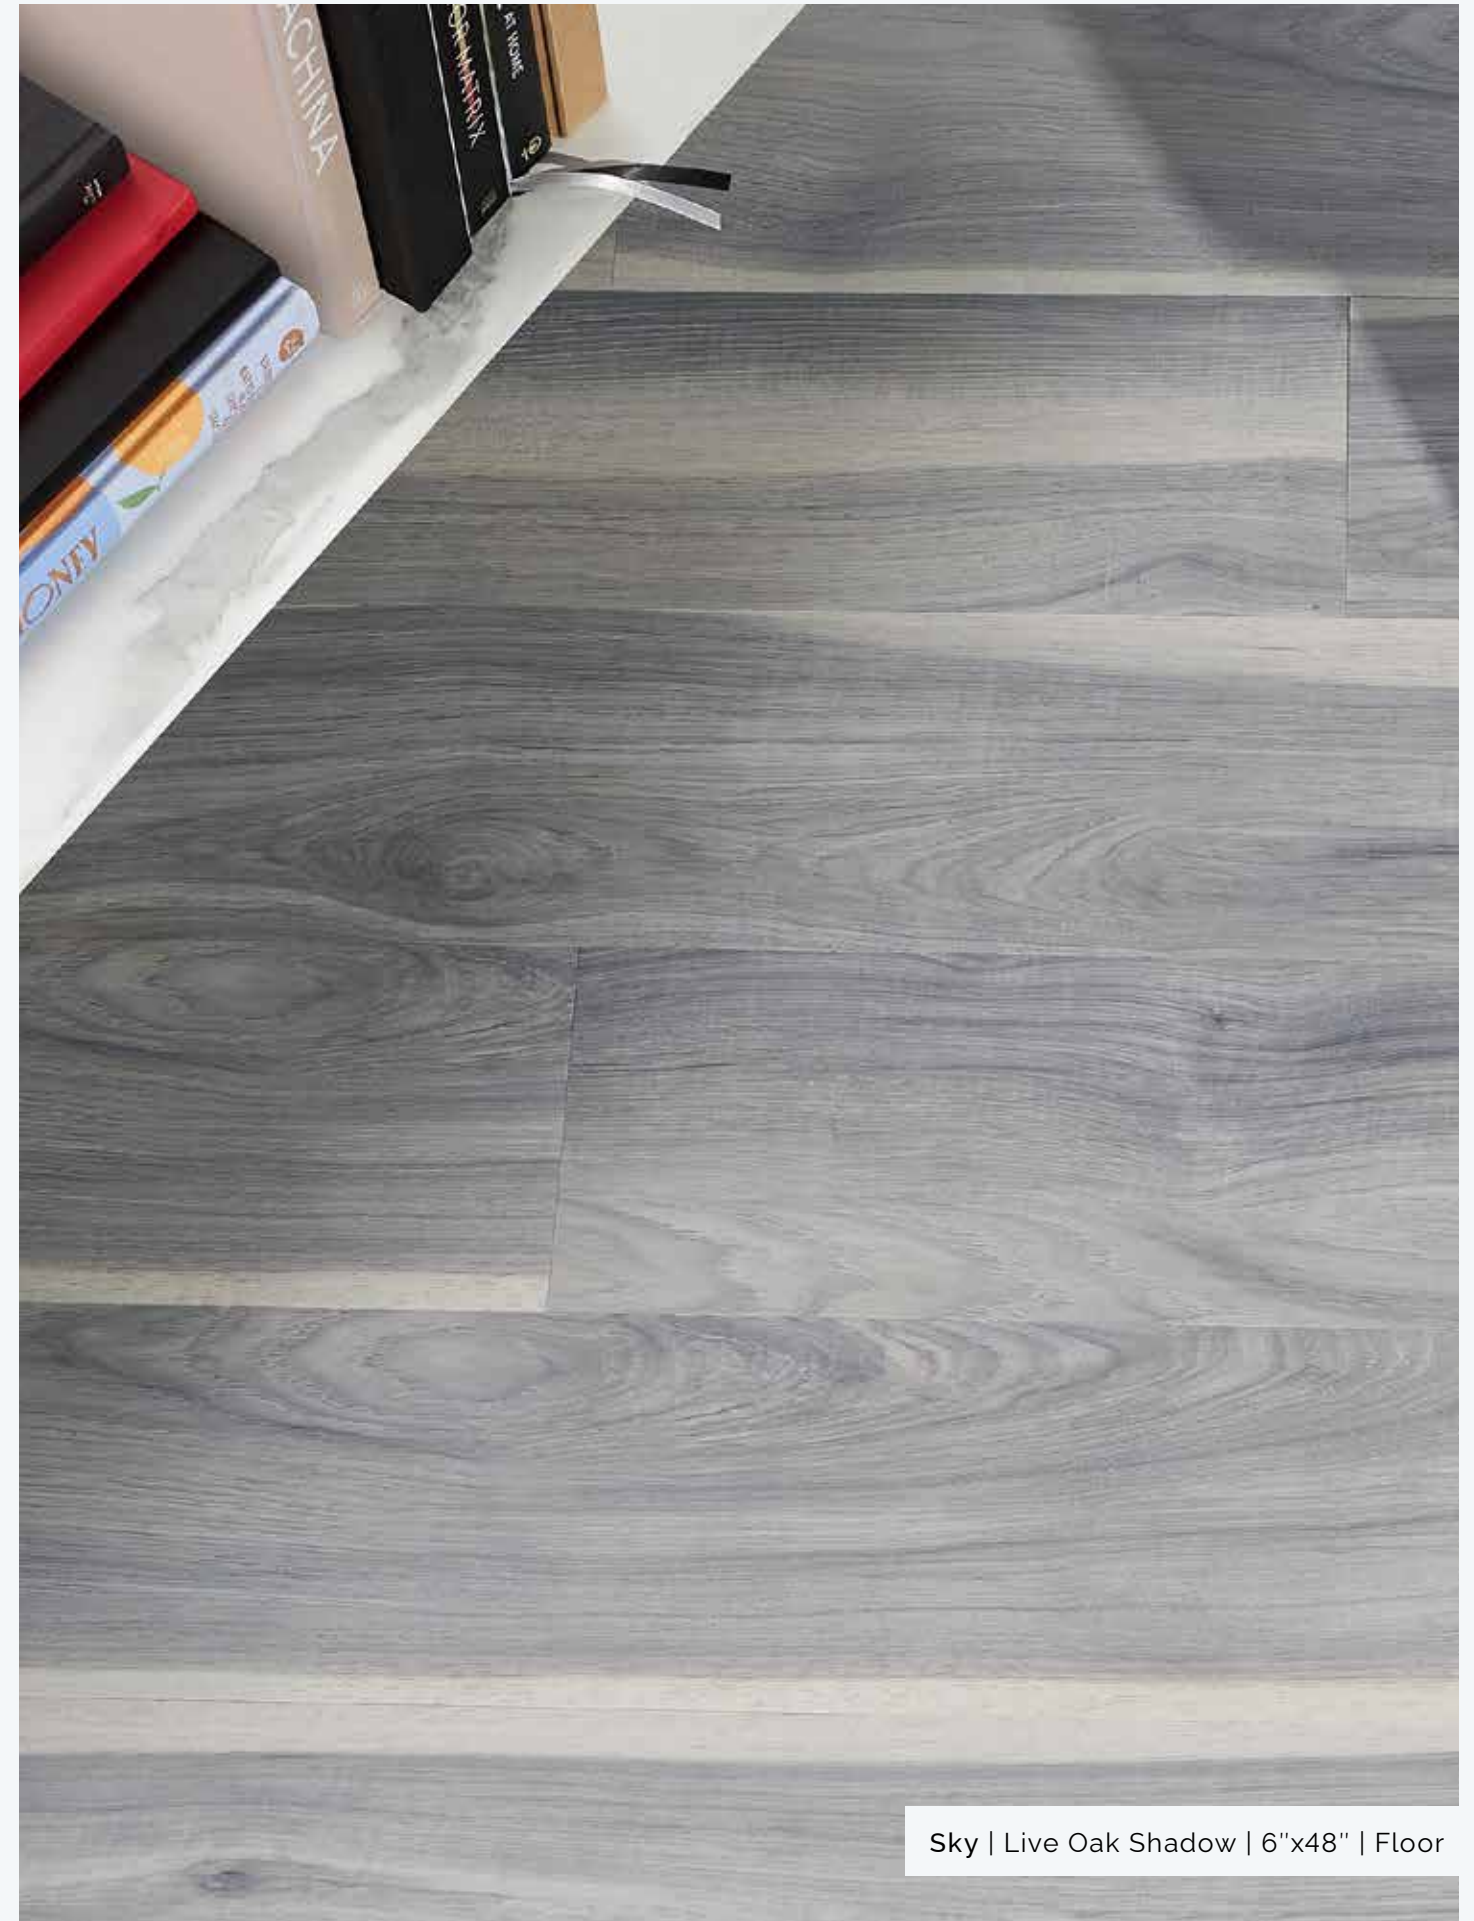

Sky | Live Oak Shadow | 6"x48" | Floor

ISKY Rigid Core Click LVT | Glue Down LVT

IZES + FORMATS



6"x48" | Rigid-Core Click



6"x48" | Glue Down

DESIGN	SIZE	RIGID-CORE CLICK	GLUE DOWN
Live Oak Shadow	6X48	●	●
Live Oak Coastal	6X48	●	●
Shellbark Hickory Bliss	6X48	●	●
Driftwood Hickory Sea	6X48	●	●

● In Stock | ■ Available to Order



Sky | Shellbark Hickory Bliss | 6"x48" | Floor

ISKY Rigid Core Click LVT | Glue Down LVT

RIGID CORE CLICK TECHNICAL DATA

12 MIL RIGID-CORE CLICK SPECIFICATIONS	
All Colors In Stock and Ready to Ship	
Available Sizes:	6" x 48"
Construction:	Rigid Core Luxury Vinyl Tile
Classification:	ASTM F3261 Class I, Type B, Grade I, Backing Class B
Total Thickness:	4.5mm (0.180") (Includes 1.0mm Acoustic Backing)
Wear Layer Thickness:	12 mil (0.30")
Edge Treatment:	Micro-Bevel
Finish:	ProTx™
Color:	4
Installation Method:	Rigid Core - Click
Locking System:	UNILIN Angle/Drop
Backing Color:	Black
Pieces per Carton:	14 pcs (6x48)
Weight per Carton:	39.6 lbs (6x48)
Square Feet per Carton:	27.39 ft (6x48)
Cartons per Pallet:	66 (6x48)
APPLICATIONS	
Commercial Spaces: Foot Traffic Only and Light Rolling Loads under 500 lbs. Residential: Multi-Family, Single Family	

RIGID CORE CLICK TECHNICAL DATA

12 MIL RIGID-CORE CLICK	
Dimensional Stability (ASTM F2199):	Passes - Max 0.020 in/lin ft
Squareness (ASTM F540):	Passes - Max ± 0.010
Flatness (ISO 24337)	Passes
Opening (ISO 24337)	Passes
Ledging (ISO 24337)	Passes
Residual Indentation (ASTM F1914):	Avg. ≤ 0.007 in. (0.18 mm) No puncture thru wear layer/décor to Rigid Core
Static Load (ASTM F970 mod.):	Passes - Modified Test (anything beyond 250 PSI) - 1,500 PSI; Residual Indent ≤ 0.005"
Acoustics (ASTM E492)	54 - Over 6" Concrete Slab 68 - Over 6" Concrete Slab and Drop Ceiling
Flooring Radiant Panel (ASTM E648):	Passes - Class 1; ≥ 0.45 watts/cm2
Smoke Density (ASTM E662):	Passes - ≤ 450
Slip Resistance (ASTM D2047):	Passes - SCOF ≥ 0.6
Resistance to Light (ASTM F1515):	Passes - ΔΣ ≤ 8.0
Chemical Resistance (ASTM F925):	Excellent
Resistance to Heat (ASTM F1514):	Passes
Castor Chair (EN 425)	Passes



ISKY Rigid Core Click LVT | Glue Down LVT

IGLUE DOWN TECHNICAL DATA

12 MIL GLUE DOWN SPECIFICATIONS	
All Colors In Stock and Ready to Ship	
Available Sizes:	6" x 48"
Classification:	ASTM F1700 Class III, Type B
Total Thickness:	2.0 mm (0.80")
Wear Layer Thickness:	12mil (0.30mm)
Edge Treatment:	Square Edge
Finish:	ProTx™
Color:	4
Application Type:	Glue Down
Adhesive:	TileBar Trowel or Roll
Backing Color:	Black
Pieces per Carton:	20 pcs
Weight per Carton:	34.3 lbs (6x48)
Square Feet per Carton:	42.37 ft (6x48)
Cartons per Pallet:	60
APPLICATIONS	
Commercial Spaces: Light Commercial Foot Traffic Only and Light Rolling Loads Under 500 lbs.	
Residential: Multi-Family, Single Family	

IGLUE DOWN TESTING SPECIFICATIONS

12 MIL GLUE DOWN	
Flexibility (ASTM F137):	Passes - 1" Mandrel - No Crack/Break
Dimensional Stability (ASTM F2199):	Passes - Max 0.020 in/lin ft
Squareness (ASTM F540):	Passes - Max 0.010"
Static Load (ASTM F970 mod.):	Passes - Modified Test (anything beyond 250 PSI) = 2,000 PSI; Residual Indent \leq 0.005"
Residual Indentation (ASTM F1914):	Passes - $<$ 8% Avg / 10% Single Value
Flooring Radiant Panel (ASTM E648):	Passes - Class 1; \geq 0.45 watts/cm ²
Smoke Density (ASTM E662):	Passes - \leq 450
Slip Resistance (ASTM D2047):	Passes - SCOF \geq 0.6
Resistance to Light (ASTM F1515):	Passes - $\Delta\Sigma \leq$ 8.0
Chemical Resistance (ASTM F925):	Excellent
Resistance to Heat (ASTM F1514):	Passes



Sky | Driftwood Hickory Sea | 6"x48" | Floor



tilebar_{LVT}

| RESEARCHED. DESIGNED. REFINED.

Developing the perfect flooring for any application type requires thousands of thoughtful research and development hours. Today, TileBar LVT represents the industry's best flooring features, bridging the gap between luxe natural flooring and the ease of modern maintenance. Luxurious benefits include micro-beveled panels, sound-dampening acoustic backing, UNILIN angle-drop installation, fiberglass layers and high wear layer options. Explore luxury collections with exquisite value per square foot and a 10-year warranty on every floor.

| FORMULATED FOR SUCCESS

Mapping out a winning TileBar LVT solution means choosing the right product for the right application. Heavy Commercial locations with high-weight deliveries? Light Commercial needs for light rolling loads and heavy foot traffic? Multi-Family/Residential needs that can hold up to any wear and tear? With glue-down and click-in installation options available in all categories, TileBar has developed the perfect LVT solution for your application needs.